


多孔分支手套



应用

用于电缆及其分支处的防尘与防潮。分支手套内涂热熔胶。  
可适用于 2-5 芯电缆。

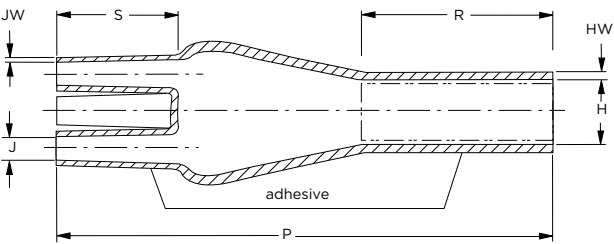

- Ha

主管内径
- Hb

主管收缩后内径
- HWb

收缩后厚度
- Ja

手指管内径
- Jb

手指管收缩后内径
- Jwb

收缩后厚度
- Pb

收缩后长度
- a

收缩前
- b

收缩后
- R

主管内涂热熔胶长度
- S

手指管长度

选型表

| 电缆截面<br>(mm <sup>2</sup> ) | 订货编号      | 尺寸        |     |      |     |      |      |      |      |      |     |
|----------------------------|-----------|-----------|-----|------|-----|------|------|------|------|------|-----|
|                            |           | H         |     | J    |     | P    | R    | S    | HW   | JW   |     |
|                            |           | a         | b   | a    | b   | b    | b    | b    | b    | b    |     |
|                            |           | 最小        | 最大  | 最小   | 最大  | ±10% | ±10% | ±10% | ±20% | ±20% |     |
| 二芯电缆<br>4-25               |           |           |     |      |     |      |      |      |      |      |     |
|                            | 302K333/S | 28        | 9.2 | 15   | 4.1 | 90   | 20   | 25   | 3.2  | 1.6  |     |
|                            | 35-150    | 302K224/S | 48  | 32   | 22  | 7    | 172  | -    | 70   | 2.0  | 2.0 |
| 150-400                    | 302K466/S | 86        | 42  | 40   | 16  | 200  | -    | 75   | 2.5  | 2.5  |     |
| 三芯电缆<br>4-35               |           |           |     |      |     |      |      |      |      |      |     |
|                            | 402W533/S | 38        | 13  | 16   | 4.2 | 103  | 45   | 28   | 2.7  | 1.5  |     |
|                            | 50-150    | 402K516/S | 63  | 22   | 26  | 9    | 180  | 85   | 40   | 3.5  | 1.5 |
|                            | 95-500    | 402W526/S | 95  | 28   | 44  | 13   | 205  | 90   | 45   | 3.5  | 2.5 |
|                            | -         | 402W248/S | 115 | 45   | 52  | 22   | 240  | 100  | 60   | 4.0  | 2.5 |
|                            | -         | 402W439/S | 170 | 60   | 60  | 30   | 252  | 90   | 66   | 4.2  | 2.6 |
| 四芯电缆<br>1.5-10             |           |           |     |      |     |      |      |      |      |      |     |
|                            | 502S012/S | 23        | 9   | 8    | 1.5 | 68   | -    | 21   | 2.1  | 1.5  |     |
|                            | 4-35      | 502K033/S | 36  | 16.5 | 14  | 3.4  | 90   | 71   | 25   | 2.5  | 1.9 |
|                            | 25-95     | 502K046/S | 45  | 19   | 20  | 7    | 165  | 75   | 40   | 3.5  | 2.0 |
|                            | 50-150    | 502K016/S | 60  | 25   | 25  | 9    | 217  | 100  | 44   | 3.5  | 2.0 |
|                            | 120-400   | 502K026/S | 100 | 31   | 40  | 13.5 | 223  | 103  | 51   | 3.5  | 2.5 |
|                            | -         | 502R810/S | 170 | 60   | 43  | 23   | 255  | 90   | 65   | 4.0  | 3.5 |
| 五芯电缆<br>25-120*            |           |           |     |      |     |      |      |      |      |      |     |
|                            | 603W035/S | 68        | 26  | 20   | 7   | 182  | 75   | 40   | 2.5  | 2.2  |     |